


# **Pleated Blinds (Top Fix)** | Fitting Instructions


### FITTING COMPONENTS

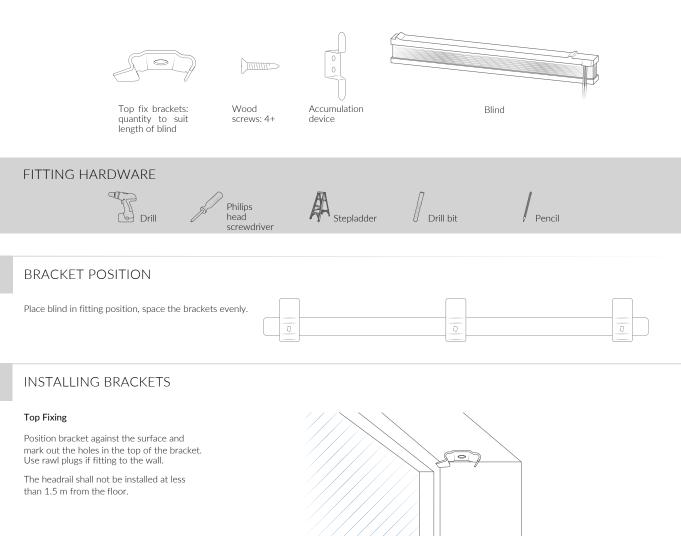

#### FITTING THE HEADRAIL

Clip the headrail onto the bracket by resting the rail onto position A and press back.

To remove the rail, depress B and pull forward.



## OPERATING THE BLIND

- To lower the blind, release the cord by moving it to the left until the cord lock releases and gently let the

To raise the blind, pull the cord down until the blind is at the height you want. Move the cord to the right

and the cord lock will lock automatically.

#### Accumulation Device (Safety Cleat)

The accumulation device shall be installed as close to the headrail as possible, and no less than 1.5m from the floor. 1. Use double sided tape, or similar, to stick the tensioning device to the wall

temporarily while preparing to drill and screw permanently into place. 2. Always wrap all loose cords around the cleat in a figure of 8 pattern. Young children can be strangled by loops in pull cords, chains, tapes, and



inner cords that operate the product. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots, and furniture away from window covering cords. Do not tie cords together. Make sure cords do not twist and create a loop.

Assembly and installation of this product can be completed by non-professionals, in accordance with current trade and safety standards. Please consult a professional if any doubt exists.

